



- IP video phone
- Robust housing, constructed of stainless steel 316
- Vandal resistant handset and armored cord
- Anti-Vandal touch screen
- Full rugged & durable keypad
- Wall mounting, simple installation
- PoE powered or DC powered
- Inductive coupler fitted as standard for hard of hearing
- CE, FCC, RoHS, ISO9001:2018 compliant

The Handset Video telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums etc. Housed in stainless steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

PC

10.1" 1280*800 IPS capacitive touch screen
Projected Capacitive Multitouch, IP65, 3mm anti-vandal cover glass UL60950 IK7-IK10
Android 8.0 OS
Quad-core ARM Cortex-A17 CPU
4G DDR and 16GB Flash
Front 2.0MP camera
With 4 x USB Port, 1 x LAN RJ45(Gigabit), (POE power supply)

SIP-VoIP TECHNICAL SPECIFICATIONS

Power Input:

12V DC or PoE

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711, G.723.1, G.729A/B, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- IEEE802.3af PoE
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

TECHNICAL SPECIFICATIONS

Casing Material

Robust 316 stainless steel body

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

Weather sealed tactile digital keypad.

Chrome key and frame made of zinc alloy.
Vandal resistance.

Temperature

Operating: -20°C to +65°C

Storing: -30°C to +75°C

Weather Resistance

IP65

Ringtone

Shrill warble tone 90dBA @1 metre typical


Hook switch

Electronic / magnetic with no visible moving parts

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

DIMENSION

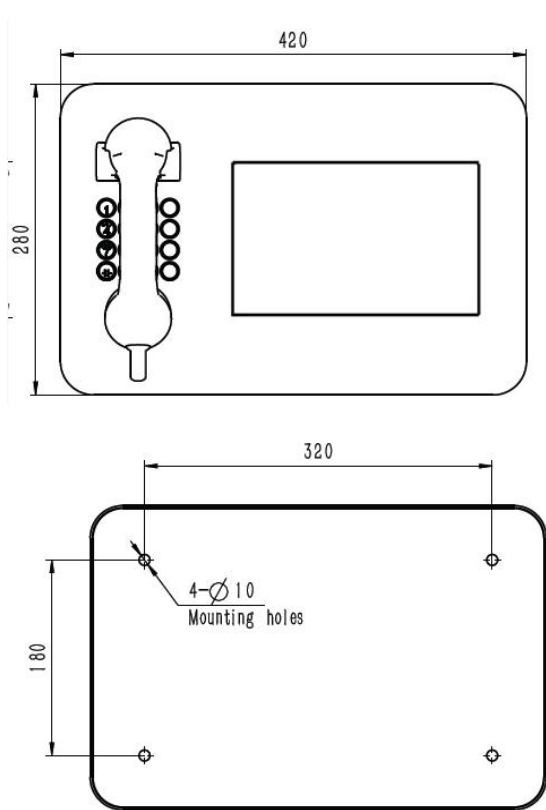

PACKAGE

Unit size: 420 *280 *52 (mm)

Carton size: 500*320 *70 (mm)

Packaging materials: pearl cotton, carton

Net weight: 5.0 KG Gross weight: 5.5KG



APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive 2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

UK Sales & Support

**Acorn
Monitoring**



JRTEL Catalogue

Acorn Monitoring Ltd

Tel: +44 (0) 1635 285 376

Email: sales@acornmonitoring.co.uk

Web: www.jrtel.co.uk