



- **Standard anti-vandal SIP video phone**
- **Robust housing, constructed of stainless steel 316**
- **Vandal resistant handset and armored cord**
- **Anti-Vandal touch screen**
- **Full rugged & durable keypad**
- **Wall mounting, simple installation**
- **PoE powered for telephone, PoE or DC 12V powered for Tablet PC**
- **Inductive coupler fitted as standard for hard of hearing**
- **CE, FCC, RoHS, ISO9001 compliant**

The Video Handset telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums etc.

Housed in stainless steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

PC

10.1" 1280*800 IPS capacitive touch screen
Projected Capacitive Multitouch, IP65,
3mm Anti-vandal tempered glass meet
UL60950 IK07

WIN10 OS

Quad-core Celeron J1900 CPU
4G DDR and 128GB Flash

Front 2.0MP camera

2 x USB 3.0, 4 x USB 2.0, 1 x LAN, 1 x
HDMI and 1 x VGA out

RJ45(Gigabit), (PoE or DC 12V power
supply)

SIP-VoIP TECHNICAL SPECIFICATIONS

Power Input:

DC12V or PoE

Port:

WAN: 10/100Base- T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base- T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711, G.723.1, G.729A/B, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- IEEE802.3af PoE
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

TECHNICAL SPECIFICATIONS

Casing Material

Robust 316 stainless steel body

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

With full keypad

Temperature

Operating: -20°C to +65°C

Storing: -30°C to +75°C

Weather Resistance

IP65

Ringling Tone

Shrill warble tone 90 dBA @ 1 metre typical



Hook switch

Electronic / magnetic with no visible moving parts

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

Dimension

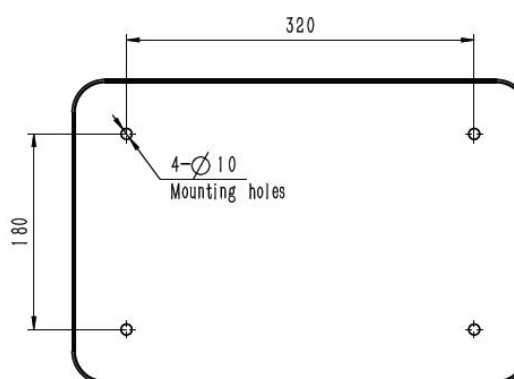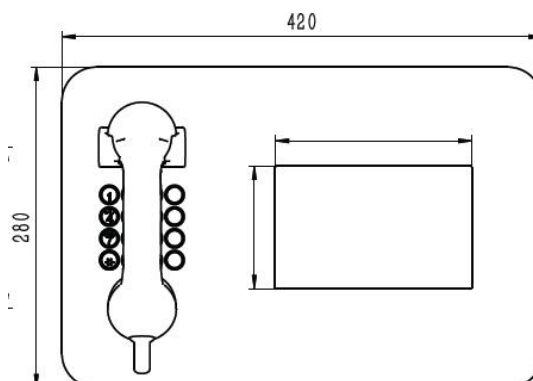

PACKAGE

Unit size: 420 *280 *52 (mm)

Carton size: 480*340 *21 (mm)

Packaging materials: pearl cotton, carton

Net weight: 10 KG Gross weight: 12 KG



APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive 2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

UK Sales & Support

**Acorn
Monitoring**



JRTEL Catalogue

Acorn Monitoring Ltd

Tel: +44 (0) 1635 285 376

Email: sales@acornmonitoring.co.uk

Web: www.jrtel.co.uk